Renault Megane III Grandtour (poza GT i RS), kombi
Rok prod: 07.2009-08.2016
Nr kat. A21696


ZESTAW ŚRUBOWY:
ŚRUBY:
M12X70-8.8 - 2 szt.
M12X35-8.8 - 4 szt.
M10x35-8.8 - 4 szt.
PODKŁADKI:
ϕ13 - 6 szt.
ϕ10,5xϕ30 - 4 szt.
SPRĘŻYNÓWKI:
ϕ12,2 - 6 szt.
ϕ10,2 - 4 szt.
NAKRĘTKI:
M12-8 -6 szt..

Instrukcja montażu:

1. Wyjąć z bagażnika spodnią wykładzinę i panele boczne.
2. Zdjąć światła tylne.
3. Zdemontować zderzak i belkę zderzeniową - nie będzie już potrzebna oraz podkładki pod belkę zderzeniową.
4. Wyciąć w podkładkach pod belkę zderz. otwory prostokątne pod ramiona haka.
5. Wsunąć ramiona haka do podłużnic i przykręcić śrubami M10x35 (podkładki powiększone, podkładki spręż,) .
6. Przykręcić podkładki (pod belkę zderz.) śrubami istniejącymi.
7. Do ramion haka przykręcić belkę główną śrubami M12x35 (podkładki, podkładki sprężyste, nakrętki)
8. Przykręcić wszystkie śruby momentami wg tabeli.
9. Zamontować zderzak.
10. Przykręcić kulę oraz blachę gniazdka elektrycznego. Momenty przykręcenia wg tabeli.
11. Podłączyć instalację elektryczną wg instrukcji.

Fitting instructions:

1. Remove the bottom cover and side panels from the trunk
2. Dissasemble the rear lights.
3. Dissasemble the bumper and bumper bar (further it will not bee necessery) and washers under bumper bar.
4. Cut out in the washers under bumpar bar rectangular holes for the hook arms A, B.
5. Insert the arms A, B into the stringers and screw with the bolts M10x35 (enlarge washers, spring washers,) .
6. Screw the washers under bumper bar with existing screws.
7. Attachthe main bar C to the arms A, B with the bolts M12x35 (washers, spring washes, nuts) .
8. Tighten all the bolts according to the torque setting - see the table.
9. Assemble the bumper.
10. Fix the ball and electric plate with the bolts M12x70 (washers, spring washers, nuts) . Torque setting according to the table.
11. Connect the electric wires according to the instructions.

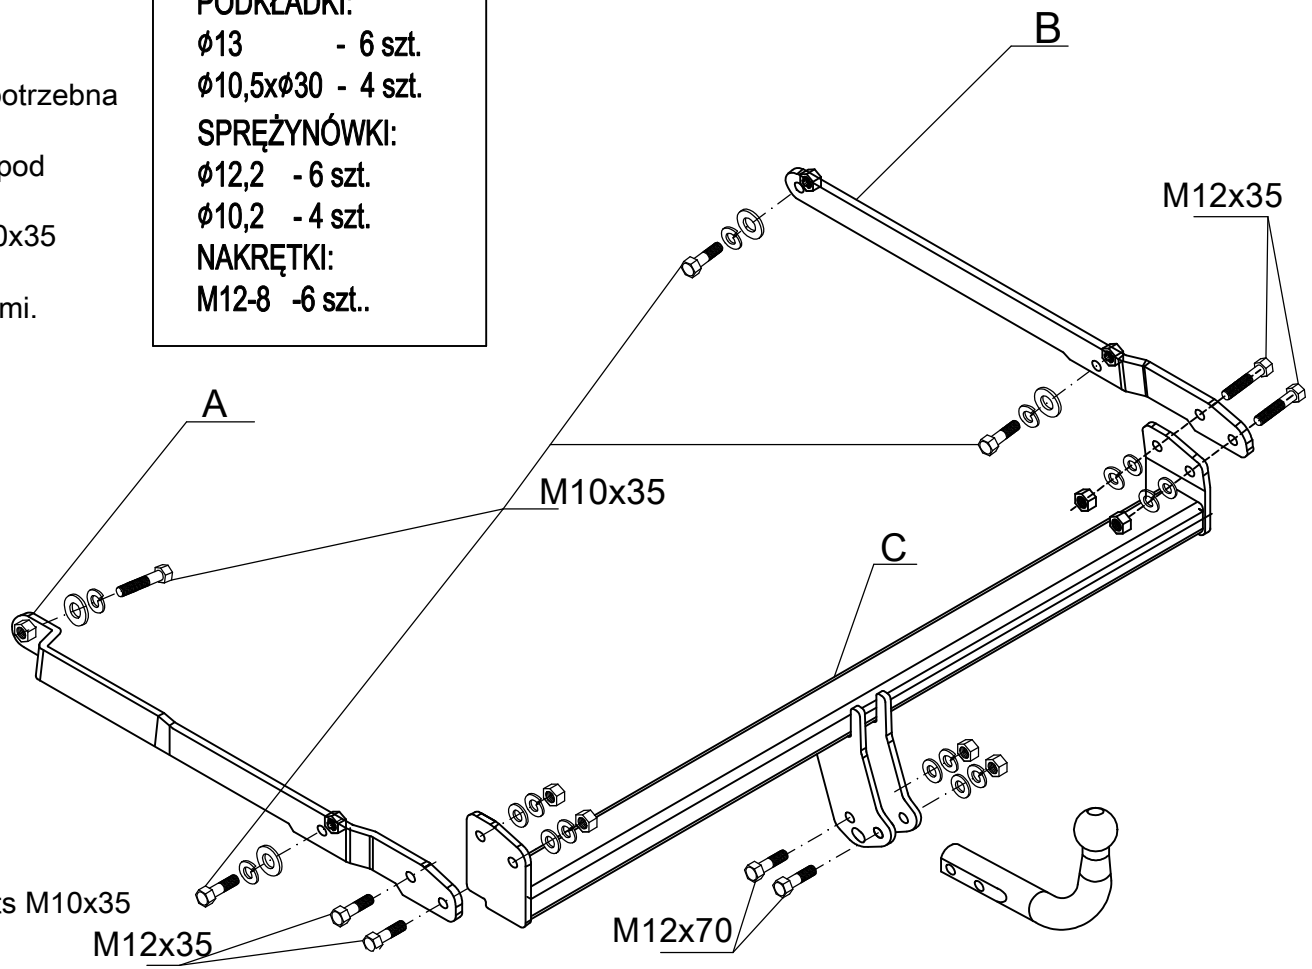

Moment skręcający dla śrub i nakrętek (8.8):
Torque settings for nuts and bolts (8.8)
M10-55Nm; M12-85Nm; M14-135Nm ; M16-195Nm.